


NOTES:

1. ALL DRIVEWAY CROSSOVERS IN THE ELAMBRA ESTATE ARE TO BE CONSISTENT WITH THE INCLUDED ILLUSTRATION BELOW AND BE CONSTRUCTED IN ACCORDANCE WITH COUNCIL'S DRIVEWAY & FOOTPATH WORKS PROCEDURE MANUAL.
2. A HEADER COURSE STENCILLED TO DELINEATE THE CROSSOVER FROM THE FOOTPATH, SHALL INCLUDE A 'SOLDIER COURSE' IN 'TERRACOTTA' COLOUR OXIDISED CONCRETE BY COLOURMIX® OR A SUITABLE BRAND EQUIVALENT.
3. THE 'SOLDIER COURSE' SHALL HAVE A BRICK SIZE IN THE PATTERN OF 230mm X 115mm.
4. THE DRIVEWAY THRESHOLD INFILL SHALL BE 'CHARCOAL' COLOUR OXIDISED CONCRETE BY COLOURMIX® OR SUITABLE BRAND EQUIVALENT.
5. ALL OXIDE SHALL BE ADDED AT THE RATE OF 10KG PER 1 CUBIC METRE OF CONCRETE.
6. THE DRIVEWAY THRESHOLD SHALL BE TEXTURED TO A HAVE A BROOMED FINISH.

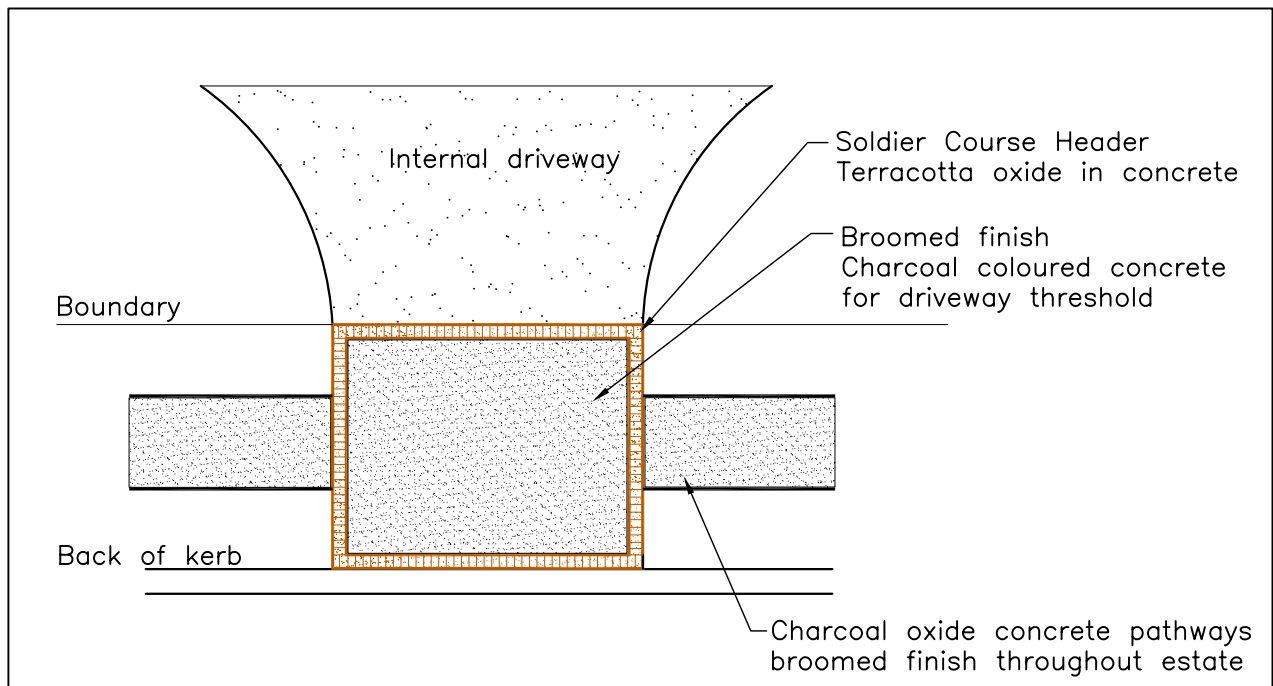

Scale	N.T.S	Issue No.	A	KIAMA MUNICIPAL COUNCIL 	Std Dwg.
Drawn	D.B	Datum	Assumed	ELAMBRA ESTATE DRIVEWAY	R08
Checked	B.W	Date	AUG 2009	CROSSOVERS	